




YANMAR®

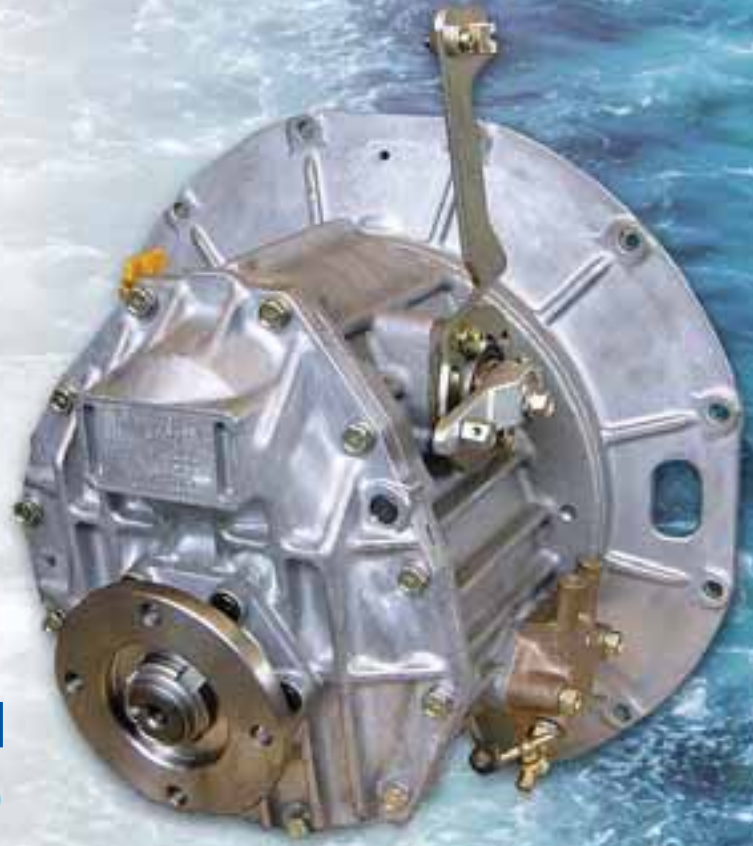


MARINE TRANSMISSION KM4A-2 (Mechanical Clutch)

SPECIFICATIONS

| MODEL | | KM4A-2 | | |
|--|--------------|---------------------------------|------|------|
| Clutch Type | | Mechanical angle servo cone | | |
| Input torque capacity Nm (ft lb) (max. rpm) | | 214 Nm (157 ft lb) (3800 rpm) | | |
| Reduction ratio | Forward | 1.47 | 2.14 | 2.63 |
| | Reverse | 1.47 | 2.14 | 2.63 |
| Direction of rotation (viewed from stern) | Input shaft | Counter-clockwise | | |
| | Output shaft | Clockwise and Counter-clockwise | | |
| Lubricating oil | | SAE #20/#30 (single grade oil) | | |
| Lubricating oil capacity | | 1.3 liter (1.36 qt) | | |
| Dry weight | | 27 kg (60 lb) | | |

"SAE #4 is standard flange". (Option: Other SAE# alternatively Borg Warner size available)

Power Diagram
for Pleasure Use

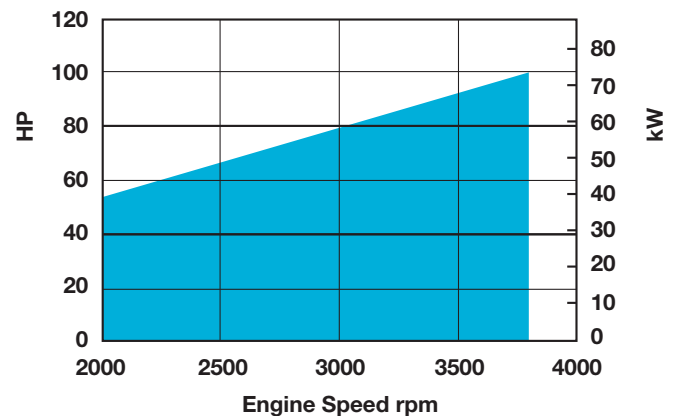

YANMAR®

Address: Brugplein 11
1332 BS Almere
Netherlands

Postaddress: Postbus 30112
1303 AC Almere
Netherlands

Internet: www.yanmarmarine.com

