



YANMAR®



MARINE TRANSMISSION


KMH40A (Hydraulic Clutch)

SPECIFICATIONS

MODEL		KMH40A			
Clutch Type		Hydraulically actuated multi-disc clutch			
Input torque capacity Nm (ft lb) (max. rpm)		457 Nm (336 ft lb) (5500 rpm)			
Reduction ratio	Forward	1.24	1.53	2.04	2.45
	Reverse	1.24	1.53	2.04	2.45
Direction of rotation (viewed from stern)	Input shaft	Counter-clockwise			
	Output shaft	Clockwise and Counter-clockwise			
Lubricating oil		SAE #30 (single grade oil)			
Lubricating oil capacity		2 liter (2.12 qt)			
Dry weight		29.5 kg (65 lb)			

"Borg Warner is standard flange". (Option: SAE# size available) Trolling Valve and/or PTO available as option.

Power Diagram for Pleasure Use

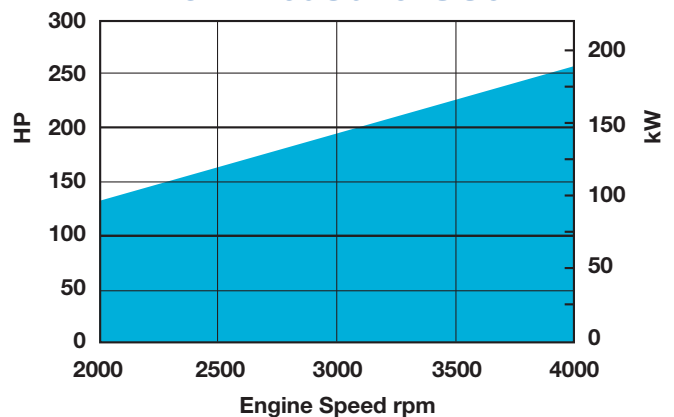

YANMAR®

Address: Brugplein 11
1332 BS Almere
Netherlands

Postaddress: Postbus 30112
1303 AC Almere
Netherlands

Internet: www.yanmarmarine.com

